



## SL-700 PLUS-

### The consequent development of the SL-700.

The **SL-700 PLUS** provides the customers with a high efficiency of at least 82% and therefore protects environment and wallet.

With four S-ATA- and three Molex-connectors, PCIe 6+2pin, 4+4pin- and 20+4pin- connectors the power supply offers a lot of options for configuration. The **SL-700 PLUS** finds its usage in older and new computer systems.

## Specifications


Output	700W
Mainboard 20+4Pin	1x
4Pin/ 4+4Pin/ 8Pin 12V	-/•/-
PCI-Express 6+2Pin	1x
PCI-Express 6Pin	-
IDE 4Pin	3x
S-ATA	4x
Floppy	1x
Fan Monitoring	-
115/230V Input	-/•
PFC	Active
ATX-Standard	ATX 2.4
Fan Dimensions	120mm
Fan Control	Auto.
Noise Level	19-25dB
Cable Management	-
Protection Circuit	OVP, SCP, OCP, OS
PSU Dimensions (H/W/D)	86/150/140mm
Package Dimensions (H/W/D)	90/215/165mm
Weight (net)	1.07Kgs
Weight (gross)	1.36Kgs
Packing Units (VE/VPE/PAL)	1/10/350
Guarantee and Warranty	24 Months Guarantee
Article Number	88882141
EAN-Code	4260133129115
Scope of delivery	Manual Power cable Velcro cable ties
80+ Certificate	-

- = existing
- = non existing

Certification:



## Connectors

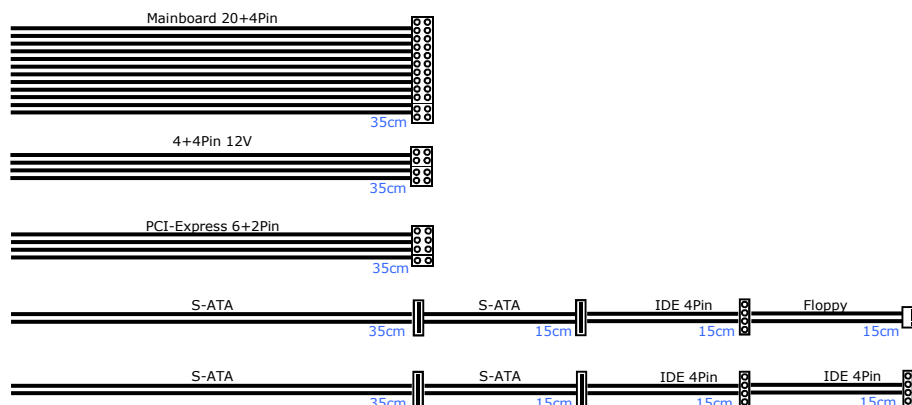

AC Input	VOLTAGE				CURRENT		FREQUENCY		
	230V				3A		50-60Hz		
DC Output	+3.3V	+5V	+12V1	+12V2	-12V	+5VsB	PS-ON	POK	COM
	18A	18A	24A	24A	0.8A	2.5A	REMOTE	P.G.	RETURN
MAX	150W		540W		9.6W	12.5W	-	-	-
	700W						-	-	-