




Specifications

Required Space	2x 5.25"-Bay
HDD Connectors	3x S-ATA or SAS
HDD Size	Standard 3.5" 2.5"
Interface	SAS or S-ATA I, II, III
Controller Connectors	3x S-ATA
Max. Data Transfer Rate	6Gbit/s
Hot Swap	•
Plug&Play	•
Fan	1x 70mm
LED	1x Fan Status 1x Temperature Status 3x HDD Access
Switch	Fan Speed HDD LED Temperature alert jumper
Power Supply	2x 15pin S-ATA
Material	Aluminum & Plastic
Case Dimensions (H/W/D)	85/145/208mm
Package Dimensions (H/W/D)	124/254/180mm
Weight (net)	1.11Kg
Weight (gross)	1.33Kg
Packing Units (VE/VPE)	1/8
Guarantee and Warranty	24 Months Warranty
Article Number	88887087
EAN-Code	4260133125766
Scope of Delivery	Screw Set Keys
Features	Two separately adjustable fan speeds Overheating alarm adjustable Spring-suspended bays to reduce vibrations Lockable trays Fan sensor

• = existing
- = non existing

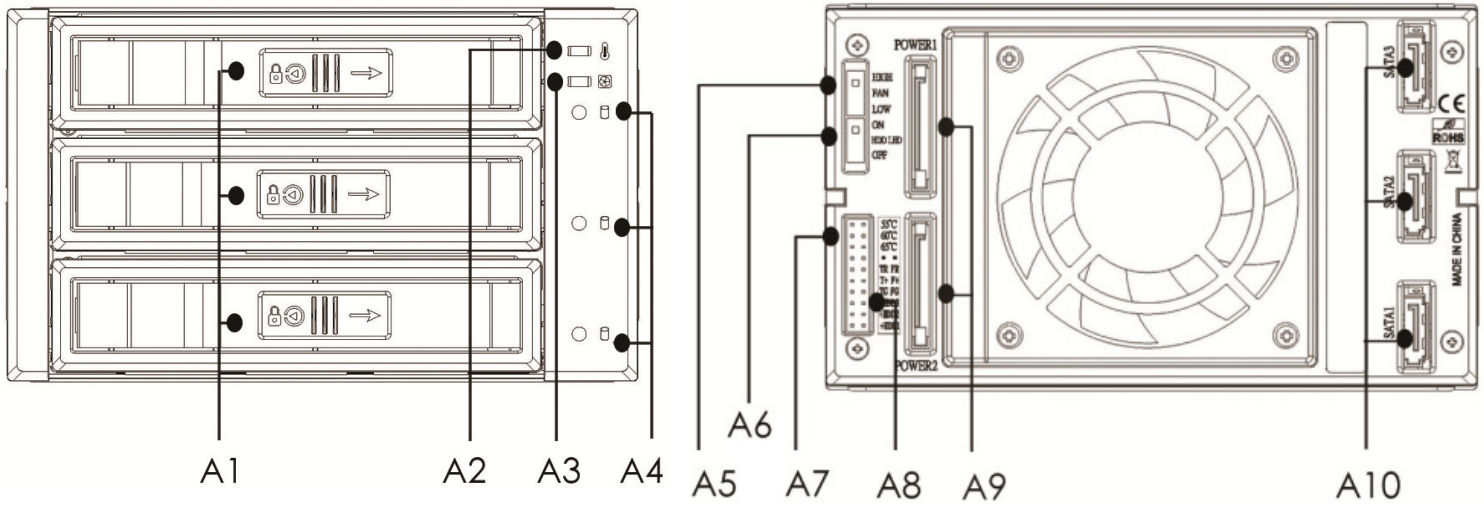

- A1 = Lockable Tray
- A2 = Temperature LED
(Normal: Green & Error : Red)
- A3 = FAN LED
(Normal : Green & Error : Red)
- A4 = Power & HDD access LED
indication
- A5 = Switch for fan

- A6= HDD LED switch (for SAS controller)
- A7=Temperature alert jumper
(55°C/60°C/65°C)
- A8 =External signal pin slot
- A9 =15pin SATA power connector
- A10 = SATA data signal connector

LED	A4		
Status	HDD in	HDD access	A6 OFF
Colour	Green	Orange	Green
Blinking	x	o	x

[*If the HDD LED switch for the SAS controller (A-3) is in the position OFF, the HDD access is switched off. In this case the LED shines blue, which means that the device is switched on but has no blinking access signal.]