



The Argus APS-420W – ideal for sophisticated office solutions

The **Argus APS-420W** provides the customers with a high efficiency of at least 82% and therefore protects environment and wallet.

Thanks to the efficient construction and the ideal configured connector layout the **APS-420W** provides with sufficient performance for the connected components.

The yellow 120mm fan works silently and ensures an optimal cooling of the power supply.

Specifications


Output	420W
Mainboard 20+4Pin	1x
4Pin/ 4+4Pin/ 8Pin 12V	-/•/-
PCI-Express 6+2Pin	-
PCI-Express 6Pin	-
IDE 4Pin	2x
S-ATA	3x
Floppy	1x
Fan Monitoring	-
115/230V Input	•/•
PFC	Active
ATX-Standard	ATX 2.31
Fan Dimensions	120mm
Fan Control	Auto.
Noise Level	19-21dB
Cable Management	-
Protection Circuit	OVP, SCP, OPP, UVP, OS
PSU Dimensions (H/W/D)	86/150/140mm
Package Dimensions (H/W/D)	170/240/95mm
Weight (net)	1.1Kg
Weight (gross)	1.42Kg
Packing Units (VE/VPE/PAL)	1/10/320
Guarantee and Warranty	24 Months Guarantee
Article Number	88882116
EAN-Code	4260133126008
Scope of delivery	screws Adapter cable 4+4pin to 4+4pin + PCIe 6+2pin power cable manual cable ties
80+ Certificate	-

• = existing
- = non existing

Certification:



Connectors

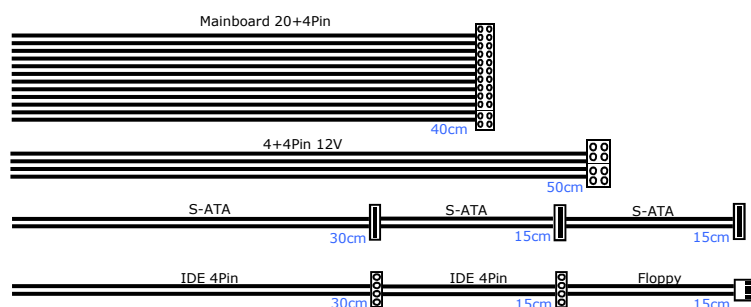

AC Input		115-230V 47-63Hz					
DC Output		3.3V	5V	12V1	12V2	-12V	5Vsb
APS-420	Max. Current	15A	15A	17A	18A	0.3A	3A
	Max. Combined Power	103W		372W		3.6W	15W
		420W					