




## Specifications

|                        |                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------|
| Output                 | 680W                                                                                                       |
| Mainboard 24Pin        | 1x                                                                                                         |
| 4Pin/ 4+4Pin/ 8Pin 12V | -/•/•                                                                                                      |
| PCI-Express 6+2Pin     | -                                                                                                          |
| PCI-Express 6Pin       | -                                                                                                          |
| IDE 4Pin               | 2x                                                                                                         |
| S-ATA                  | 2x                                                                                                         |
| Floppy                 | 1x                                                                                                         |
| Fan Monitoring         | -                                                                                                          |
| 115/230V Input         | •/•<br>(auto.)                                                                                             |
| PFC                    | Active                                                                                                     |
| Fan Dimensions         | 2x 40mm                                                                                                    |
| Fan Control            | Auto.                                                                                                      |
| Redundant              | •                                                                                                          |
| Protection Circuit     | OVP, SCP, OCP, OTP                                                                                         |
| MTBF                   | Average 100000h                                                                                            |
| Fan Dimensions (H/W/D) | 82/101/280mm                                                                                               |
| Weight (net)           | 3.36Kg                                                                                                     |
| Packing Units (VE/VPE) |                                                                                                            |
| Guarantee and Warranty | 6 Months Warranty                                                                                          |
| Article Number         | 88887131                                                                                                   |
| EAN-Code               |                                                                                                            |
| Features               | Bicoloured LED status display<br>Acoustic alarm signal when a module power<br>failing or a fan error arose |

80+ Certificate



## Connectors

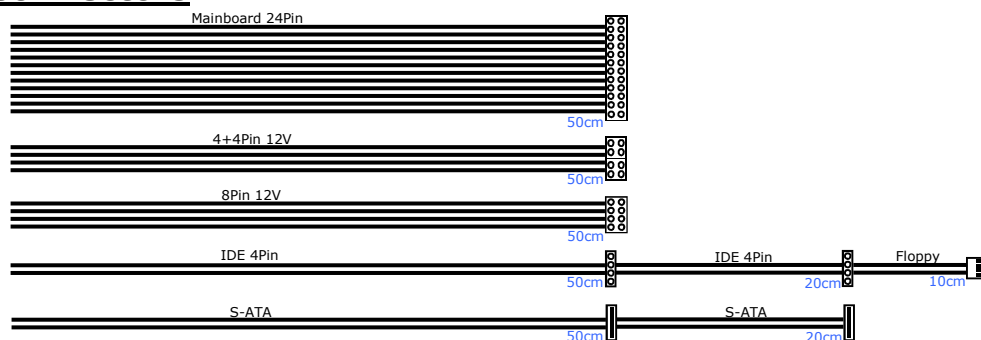

## Efficiency

|        | Light Load (20%) | Typical Load (50%) | Full Load (100%) |
|--------|------------------|--------------------|------------------|
| 115VAC | 91.88%           | 92.35%             | 90.07%           |
| 230VAC | 91.88%           | 92.35%             | 90.07%           |

| AC Input  |                     | 100-240V    10-5A    50-60Hz |     |     |      |      |
|-----------|---------------------|------------------------------|-----|-----|------|------|
| DC Output |                     | 3.3V                         | 5V  | 12V | -12V | 5Vsb |
| YH-5681H  | Max. Current        | 20A                          | 20A | 56A | 0.5A | 6A   |
|           | Max. Combined Power | 140W                         |     |     |      |      |
|           |                     | 680W                         |     |     |      |      |