



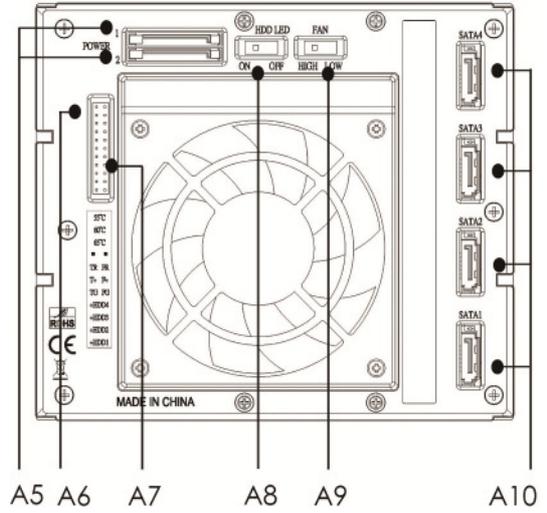

Specifications

Required Space	3x 5.25"-Bay
HDD Connectors	4x S-ATA or SAS
HDD Size	Standard 3.5" 2.5"
Interface	SAS or S-ATA I, II, III
Controller Connectors	4x S-ATA
Max. Data Transfer Rate	6Gbit/s
Hot Swap	•
Plug&Play	•
Fan	1x 80mm
LED	1x Fan Status 1x Temperature Status 4x HDD Access
Switch	Fan Speed HDD LED Temperature alert jumper
Power Supply	2x 15pin S-ATA
Material	Aluminum & Plastic
Case Dimensions (H/W/D)	125/145/210mm
Package Dimensions (H/W/D)	165/254/180mm
Weight (net)	1.80Kg
Weight (gross)	2.06Kg
Packing Units (VE/VPE)	1/6
Guarantee and Warranty	24 Months Warranty
Article Number	88887088
EAN-Code	4260133125773
Scope of Delivery	Screw Set Keys
Features	Two separately adjustable fan speeds Overheating alarm adjustable Spring-suspended bays to reduce vibrations Lockable trays Fan sensor

- = existing
- = non existing

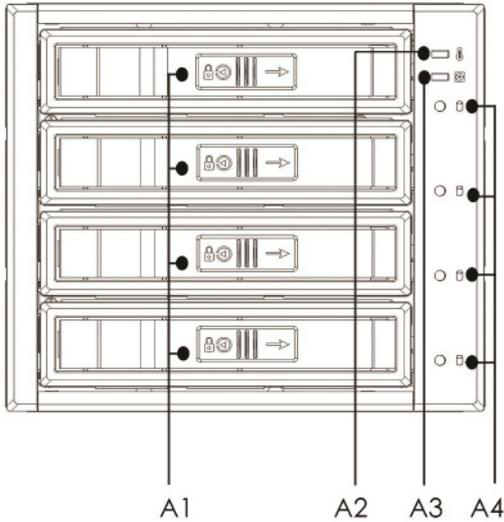

- A1 = Lockable Tray
- A2 = Temperature LED
(Normal: Green Error: Red)
- A3 = FAN LED
(Normal: Green Error: Red)
- A4 = Power & HDD access LED
indication
- A5 = 15pin SATA power connector

- A6 = Temperature alert jumper
(55°C/60°C/65°C)
- A7 = External signal pin slot
- A8 = HDD LED switch (for SAS
controller)
- A9 = Switch for fan
High (3000rpm)/Low (2400rpm)
- A10 = SATA data signal connector

LED	A4		
Status	HDD in	HDD access	A8 OFF
Colour	Green	Orange	Green
Blinking	x	o	x

[*If the HDD LED switch for the SAS controller (A-3) is in the position OFF, the HDD access is switched off. In this case the LED shines blue, which means that the device is switched on but has no blinking access signal.]