



Fast Ethernet PCI Adapter

AD-1101



Features:

-  Support 32-bit PCI interface
-  Comply with the IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX specifications
-  Support Full-Duplex, achieve up to 20M/200M network bandwidth
-  Plug and Play
-  Support Windows 98 (32/64 bits), Windows XP (32/64 bits), Windows 2000 (32/64 bits), Windows Vista(32/64 bits), Windows 7(32/64 bits), Windows 8/8.1(32/64 bits), MAC OS 9.0/10.04/10.1/10.2.

Brief


The netis AD1101 Fast Ethernet PCI Adapter is a highly integrated and cost-effective Adapter that supports 32-bit data transfer and reduces CPU loading using bus master architecture. It also provides WOL and Boot-ROM. The netis Fast Ethernet PCI Adapter keeps low cost and eliminates usage barriers. It is the easiest way to upgrade a network from 10 to 100Mbps. It supports both 10Mbps and 100Mbps network speed both in Half-Duplex and Full-Duplex transfer modes, using Auto-Negotiation technology to detect the network speed. It also can be widely used in most modern Operating System

Specification

Hardware	
Standard	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX
Interface	32-bit PCI, 1*10/100Mbps RJ45 port, Auto-Negotiation, Auto MDI/MDIX
LED	LNT/ACT
Cabling Type	UTP CAT 5 EIA/TIA-568 100-ohm screened twisted pair (STP)
Date Transmission Rate	10/100Mbps(Half-duplex) 20/200Mbps(Full-duplex)
WOL	Supported
BOOT-ROM	Supported
Network Driver	Windows 98 SE, Windows ME, Windows 2000, Windows XP (32/64 bits), Windows Vista(32/64 bits), Windows 7(32/64 bits), Windows 8/8.1(32/64 bits), MAC OS 9.0/10.04/10.1/10.2.

Others	
Certification	FCC, CE
Environment	Operating Temperature: 0°C~40°C Storage Temperature: -20°C~65°C Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Package	1*AD1101 1*Low Profile Bracket 1*Driver CD 1*Quick Installation Guide

Topological Graph

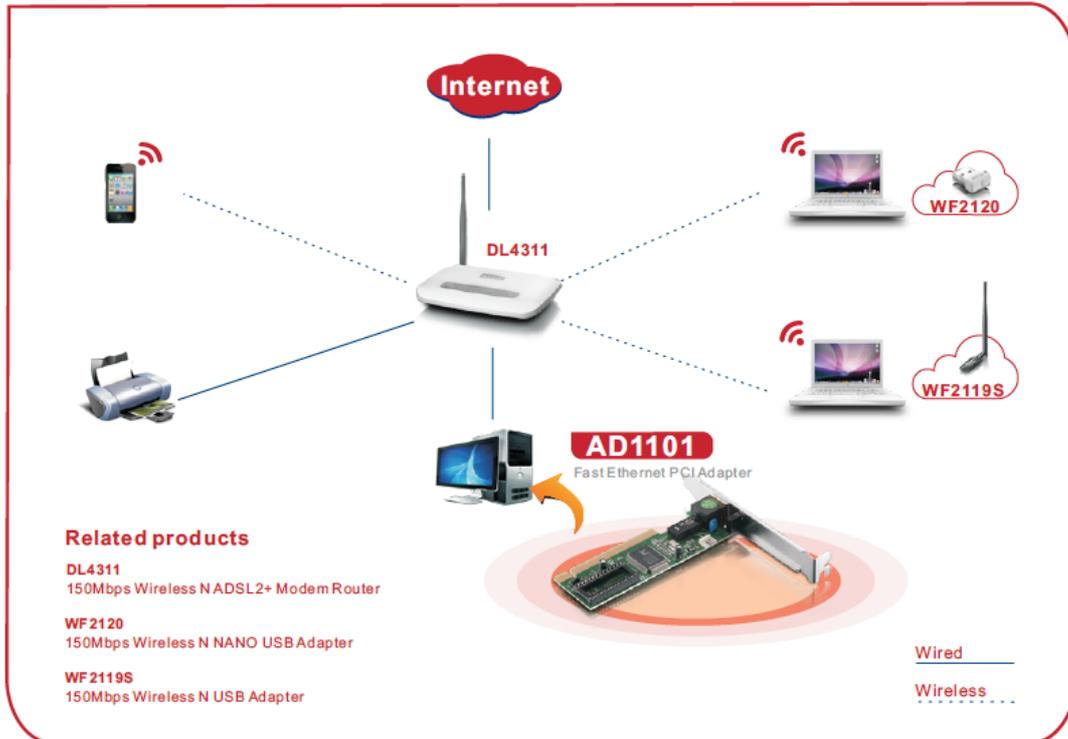

Specifications are subject to change without notice. Netis is a registered trademark of Netis Systems Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from Netis Systems Co., Ltd.